



Clamshell Dredging Sdn Bhd



At A Glance

Project:

Sub-Contract for Civil Offshore Work of Combined Cycle Power Generating Facility of Up to 1200mw at Pulau Indah, Selangor.

Owner:

Pulau Indah Power Plant Sdn Bhd

Client:



See Yong & Son Construction Sdn Bhd

Contract Sum:

RM 8,766,428.60

Contract Period:

18.05.2022 — 15.01.2023

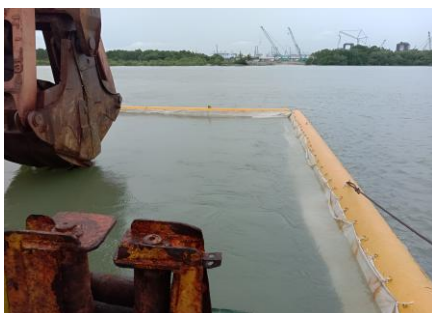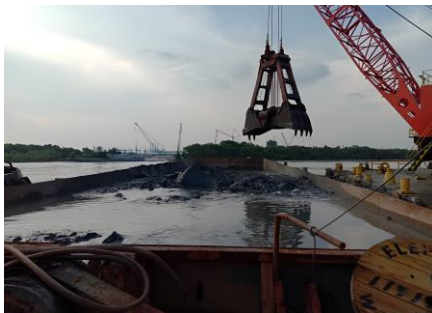

P122 : Dredging Works for Pulau Indah Combined Cycle Power Plant (CCPP)

Dredging Works

Pulau Indah 1200mw Combined Cycle Power Plant (CCPP) project is a project developed by Pulau Indah Power Plant Sdn Bhd. The main work scope is dredging work for Offshore Intake and Discharge Pipeline, where it covers the area for GRP installation, and intake head structure installation, of Pulau Indah Cycle Power Plant project.

Design Parameters :

Design Depth	: - varies -
Disposal Location Distance	: approx. 10 nautical miles
Dredge Quantity	: 391,201.30 m ³ (Provisional)

Vessel Deployed :

No.	Equipment	Capacity	Quantity
1	Grab Dredger	13m ³	1
2	Non-propelled Split Hopper Barge	1,000m ³	2
3	Tug Boat	1,000bhp & 1,200bhp	2
4	Anchor Handling Tug	5T	1

