



Clamshell Dredging Sdn Bhd



At A Glance

Project:

Maintenance Dredging at Quay 1, Quay 2, Quay 3 & Quay 6 (Kawasari CPP Top Side)

Owner:


Malaysia Marine and Heavy Engineering Sdn Bhd

Contract Sum:

RM 3,078,325.00

Contract Period:

06.04.2022 — 06.07.2022

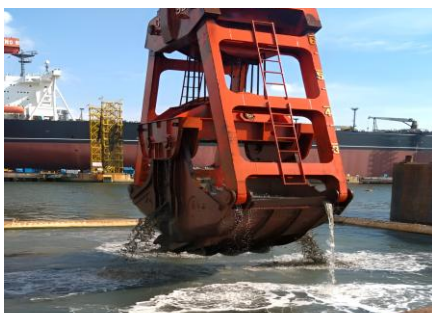

P123 : Maint. Dredging at Q1,Q2,Q3 & Q6 (Kawasari CPP Top Side)

Dredging Works

MMHE has awarded CDSB to excavate / dredge and remove site soil and rock of seabed to provide berthing pocket for load out barges and vessels up to -10m The scope of works comprised of dredging to the design layout and levels including disposal of dredging materials to approved dumping grounds within 3 months.

Design Parameters :

Design Depth	: -6.0mCD, -8.0mCD & -10.5mCD
Disposal Location Distance	: approx. 21 nautical miles
Dredge Quantity	: 38,873.40 m ³ (Provisional)

Vessel Deployed :

No.	Equipment	Capacity	Quantity
1	Grab Dredger	16m ³	1
2	Non-propelled Split Hopper Barge	1,000m ³	1
3	Self-propelled Split Hopper Barge	1,000m ³	1
4	Tug Boat	1,000bhp	1
5	Anchor Handling Tug	5T	1

